

A modern office interior with a dark, industrial aesthetic. The ceiling features exposed ductwork and several long, linear LED light fixtures that cast a soft glow. In the foreground, a dark blue sofa with colorful cushions is visible. The background shows a glass-walled meeting room with tables and chairs. The overall atmosphere is sleek and contemporary.

INLED

inled.com.ua


LINEAR LIGHTS

inled.com.ua





LINEAR LIGHTS INLED

- Own production
- Individual approach
- Technical support
- Painting according to RAL scale
- Flexible pricing
- Quality assurance
- Short production terms
- Certified Product

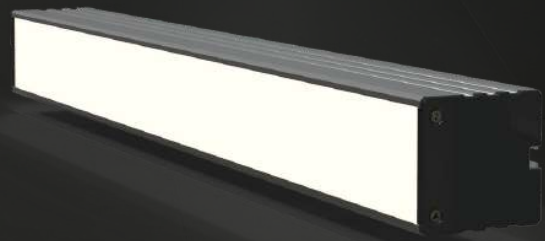


inled.com.ua

LINEAR LIGHT INF-LED

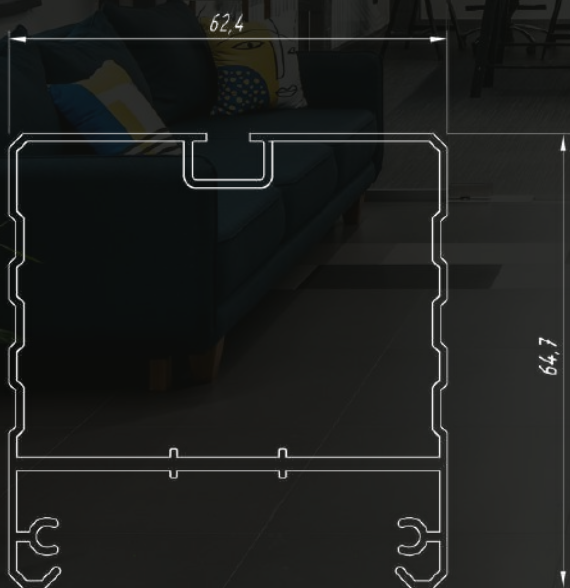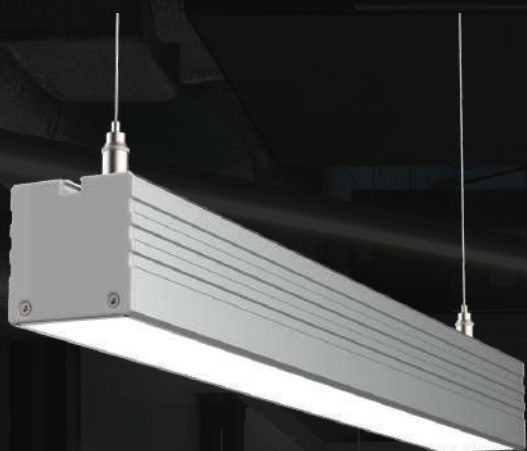


BODY	ALUMINUM AW-6063
OPTIC	OPAL POLYCARBONATE
BODY COLOR (RAL)	On request
INGRESS PROTECTION	IP 42
SYSTEM POWER	up to 40 W per meter
POWER SUPPLY	HELVAR (Finland)
POWER FACTOR	>97
FLICKERING	1-3 %
LED SMD2835	SAMSUNG, SEUOL
COLOR TEMPERATURE	3000, 4000, 5000 K
STANDART	LM-80
COLOR RENDERING INDEX RA	>85-97 Ra
BEAM ANGLE	110°
WARRANTY	from 36 months
DIMENSIONS	H64xW63xL up to 6000 mm
MOUNTING OPTIONS	pendant, bracket

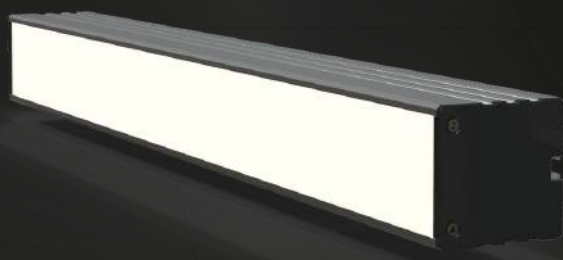



LINEAR LIGHT INF-LED-N



BODY	ALUMINUM AW-6063
OPTIC	OPAL POLYCARBONATE
BODY COLOR (RAL)	On request
INGRESS PROTECTION	IP 42
SYSTEM POWER	up to 40 W per meter
POWER SUPPLY	HELVAR (Finland)
POWER FACTOR	>97
FLICKERING	1-3 %
LED SMD2835	SAMSUNG, SEUOL
COLOR TEMPERATURE	3000, 4000, 5000 K
STANDART	LM-80
COLOR RENDERING INDEX	>85-97 Ra
BEAM ANGLE	110°
WARRANTY	from 36 months
DIMENSIONS	H70xW50xL up to 6000 mm
MOUNTING	pendant, bracket

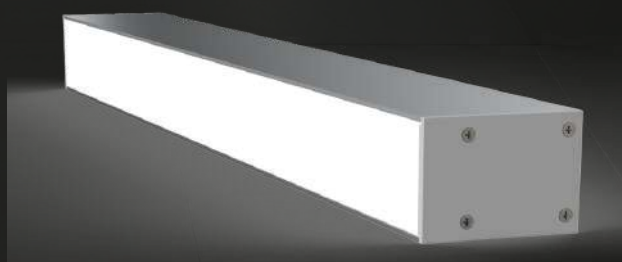


LINEAR LIGHT INF-FCD

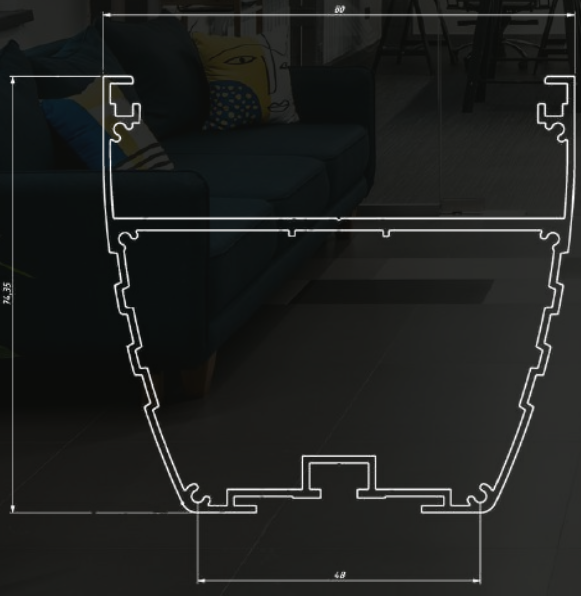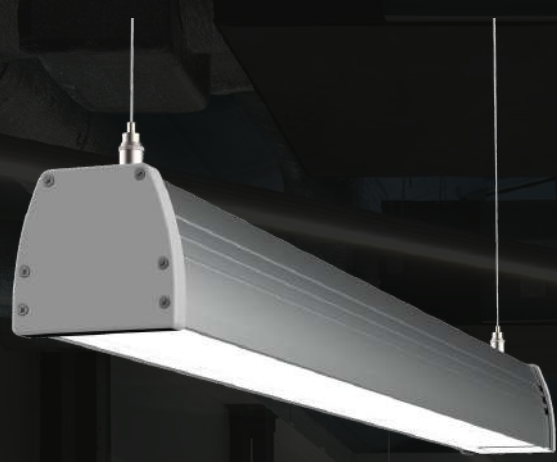

BODY	ALUMINUM AW-6063
OPTIC	CLEAR POLYCARBONATE
BODY COLOR (RAL)	On request
INGRESS PROTECTION	IP 65
SYSTEM POWER	up to 80 W per meter
POWER SUPPLY	HELVAR (Finland)
POWER FACTOR	>97
FLICKERING	1-3 %
LED SMD2835	SAMSUNG, SEUOL
COLOR TEMPERATURE	3000, 4000, 5000 K
STANDART	LM-80
COLOR RENDERING INDEX	>85 -97 Ra
BEAM ANGLE	120°
WARRANTY	from 36 months
DIMENSIONS	H74xW80xL up to 3000 mm
MOUNTING	pendant, bracket



LINEAR LIGHT INF-FCD-LENS

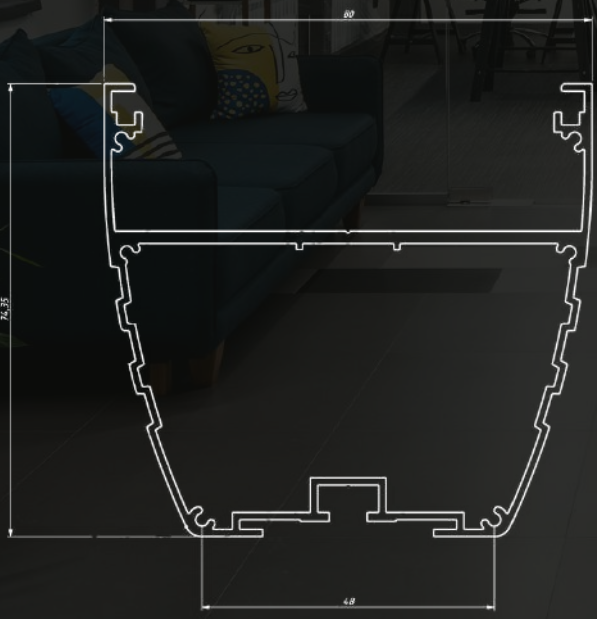



BODY	ALUMINUM AW-6063
OPTIC	LENS
BODY COLOR (RAL)	On request
INGRESS PROTECTION	IP 65
SYSTEM POWER	up to 80 W per meter
POWER SUPPLY	Mean Well
POWER FACTOR	>97
FLICKERING	1-3 %
LED SMD2835	SEUOL
COLOR TEMPERATURE	3000, 4000, 5000 K
STANDART	LM-80
COLOR RENDERING INDEX	>85-97 Ra
BEAM ANGLE	to order
WARRANTY	from 36 months
DIMENSIONS	H74xW80xL up to 3000 mm
MOUNTING	pendant, bracket



LINEAR LIGHT INF-LED-TRUNK




BODY	ALUMINUM AW-6063
OPTIC	OPAL POLYCARBONATE
BODY COLOR (RAL)	On request
INGRESS PROTECTION	IP 20
SYSTEM POWER	up to 40 W per meter
POWER SUPPLY	HELVAR (Finland)
POWER FACTOR	>97
FLICKERING	1-3 %
LED SMD2835	SAMSUNG, SEUOL
COLOR TEMPERATURE	3000, 4000, 5000 K
STANDART	LM-80
COLOR RENDERING INDEX	>85-97 Ra
BEAM ANGLE	110°
WARRANTY	from 36 months
DIMENSIONS	H64xW63xTrunk
MOUNTING	pendant

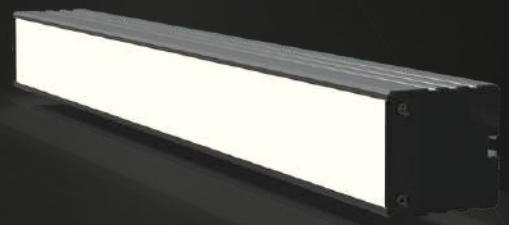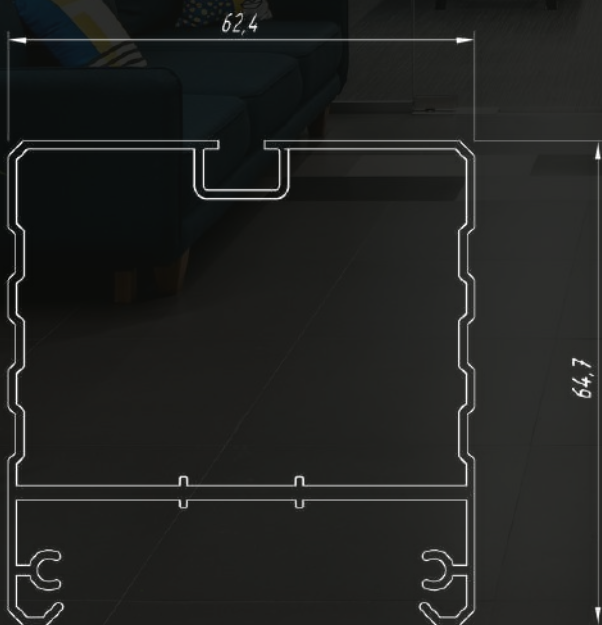


LINEAR LIGHT INF-LED-N-LENS



BODY	ALUMINUM AW-6063
OPTIC	LENS
BODY COLOR (RAL)	On request
INGRESS PROTECTION	IP 20
SYSTEM POWER	up to 40 W per meter
POWER SUPPLY	HELVAR (Finland)
POWER FACTOR	>97
FLICKERING	1-3 %
LED SMD2835	SAMSUNG, SEUOL
COLOR TEMPERATURE	3000, 4000, 5000 K
STANDART	IESNA LM-80
COLOR RENDERING INDEX	>85 -97 Ra
BEAM ANGLE	to order
WARRANTY	from 36 months
DIMENSIONS	H70xW50xTrunk
MOUNTING	pendant

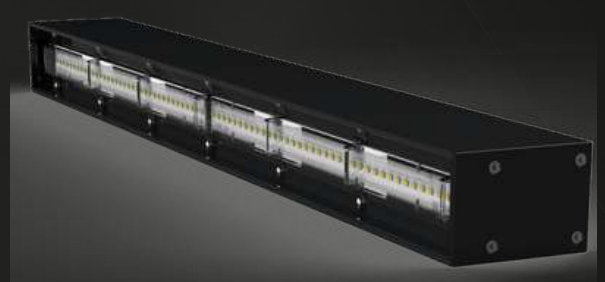


LINEAR LIGHT INF-LED-N-TRUNK

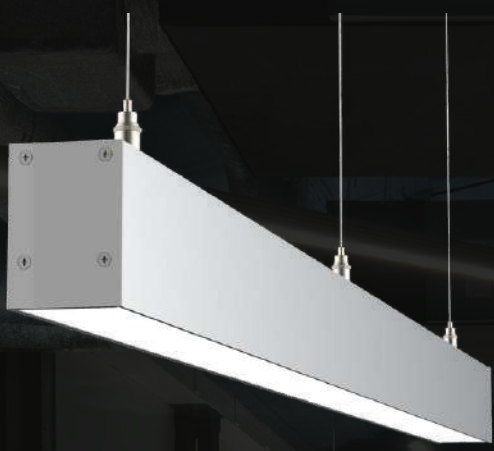


BODY	ALUMINUM AW-6063
OPTIC	OPAL POLYCARBONATE
BODY COLOR (RAL)	On request
INGRESS PROTECTION	IP 20
SYSTEM POWER	up to 40 W per meter
POWER SUPPLY	HELVAR (Finland)
POWER FACTOR	>97
FLICKERING	1-3 %
LED SMD2835	SAMSUNG, SEUOL
COLOR TEMPERATURE	3000, 4000, 5000 K
STANDART	LM-80
COLOR RENDERING INDEX	>85 -97 Ra
BEAM ANGLE	to order
WARRANTY	from 36 months
DIMENSIONS	H70xW50xTrunk
MOUNTING	pendant



LINEAR LIGHT INF-LED-N-SQUARE

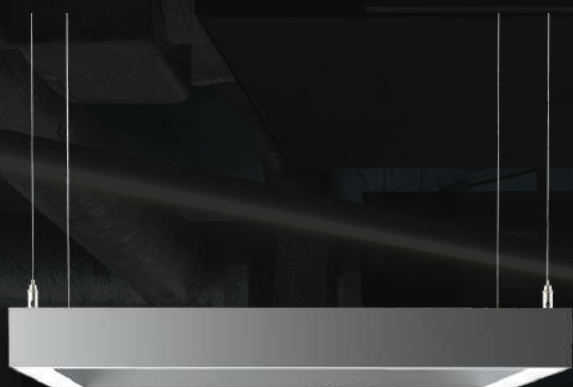



BODY	ALUMINUM AW-6063
OPTIC	OPAL POLYCARBONATE
BODY COLOR (RAL)	On request
INGRESS PROTECTION	IP 20
SYSTEM POWER	up to 40 W per meter
POWER SUPPLY	HELVAR (Finland)
POWER FACTOR	>97
FLICKERING	1-3 %
LED SMD2835	SAMSUNG, SEUOL
COLOR TEMPERATURE	3000, 4000, 5000 K
STANDART	LM-80
COLOR RENDERING INDEX	>85-97 Ra
BEAM ANGLE	110°
WARRANTY	from 36 months
DIMENSIONS	H70xW50
SHOULDER LENGTH	to order
MOUNTING	pendant

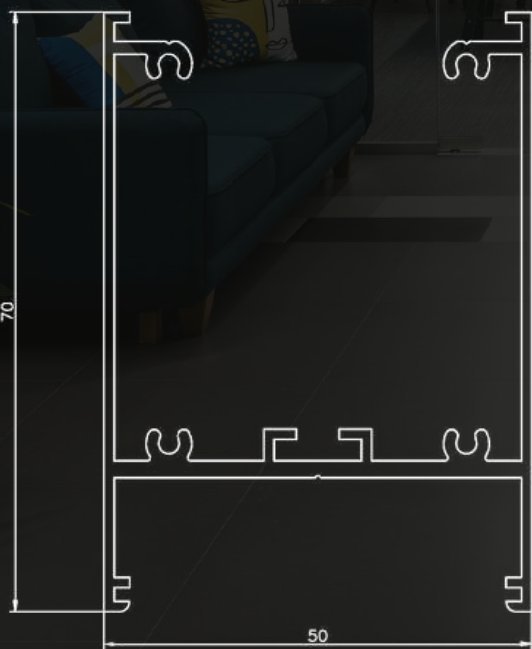

LINEAR LIGHT INF-LED-N-MB



BODY	ALUMINUM AW-6063
OPTIC	OPAL POLYCARBONATE
BODY COLOR (RAL)	On request
INGRESS PROTECTION	IP 20
SYSTEM POWER	up to 40 W per meter
POWER SUPPLY	HELVAR (Finland)
POWER FACTOR	>97
FLICKERING	1-3 %
LED SMD2835	SAMSUNG, SEUOL
COLOR TEMPERATURE	3000, 4000, 5000 K
STANDART	LM-80
COLOR RENDERING INDEX	>85-97 Ra
BEAM ANGLE	110°
WARRANTY	from 36 months
DIMENSIONS	H70xW50
SHOULDER LENGTH	to order
MOUNTING	pendant

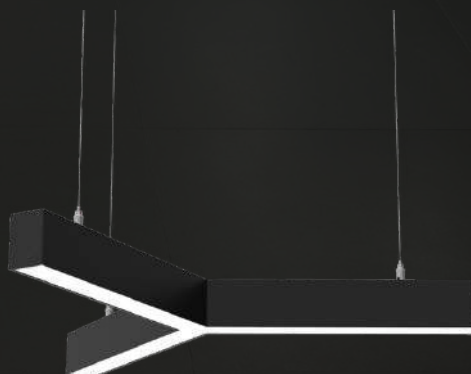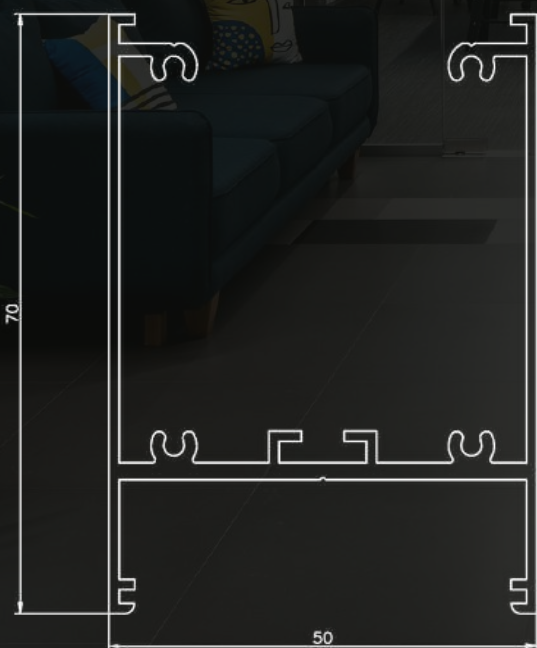

LINEAR LIGHT INF-LED-N-LX





BODY	ALUMINUM AW-6063
OPTIC	OPAL POLYCARBONATE
BODY COLOR (RAL)	On request
INGRESS PROTECTION	IP 20
SYSTEM POWER	up to 40 W per meter
POWER SUPPLY	HELVAR (Finland)
POWER FACTOR	>97
FLICKERING	1-3 %
LED SMD2835	SAMSUNG, SEUOL
COLOR TEMPERATURE	3000, 4000, 5000 K
STANDART	LM-80
COLOR RENDERING INDEX	>85-97 Ra
BEAM ANGLE	110°
WARRANTY	from 36 months
DIMENSIONS	H70xW50
SHOULDER LENGTH	to order
MOUNTING	pendant




LINEAR LIGHT INF-LED-N-ZIGZAG



BODY	ALUMINUM AW-6063
OPTIC	OPAL POLYCARBONATE
BODY COLOR (RAL)	On request
INGRESS PROTECTION	IP 20
SYSTEM POWER	up to 40 W per meter
POWER SUPPLY	HELVAR (Finland)
POWER FACTOR	>97
FLICKERING	1-3 %
LED SMD2835	SAMSUNG, SEUOL
COLOR TEMPERATURE	3000, 4000, 5000 K
STANDART	LM-80
COLOR RENDERING INDEX	>85 -97 Ra
BEAM ANGLE	110°
WARRANTY	from 36 months
DIMENSIONS	H70xW50
SHOULDER LENGTH	to order
MOUNTING	pendant

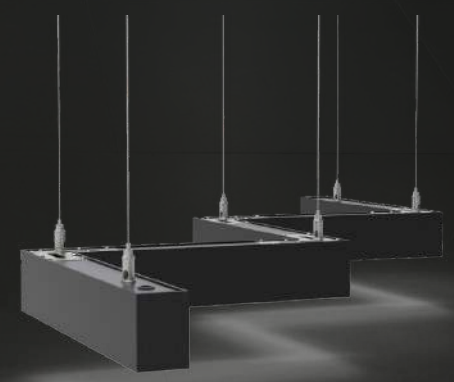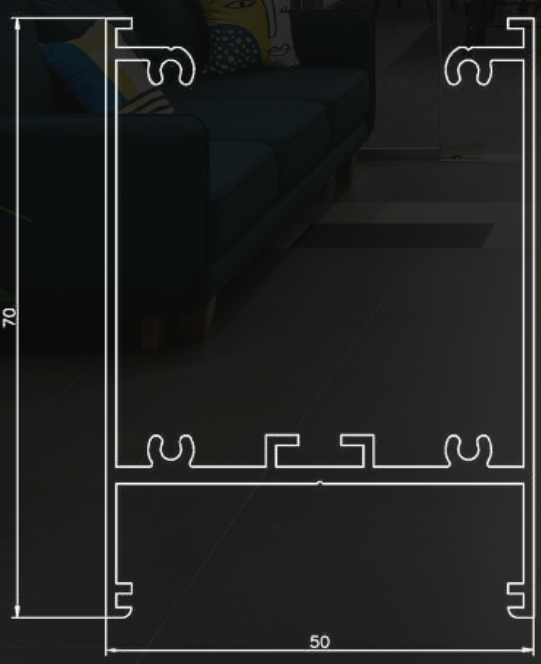


LINEAR LIGHT INF-LED-KOSA

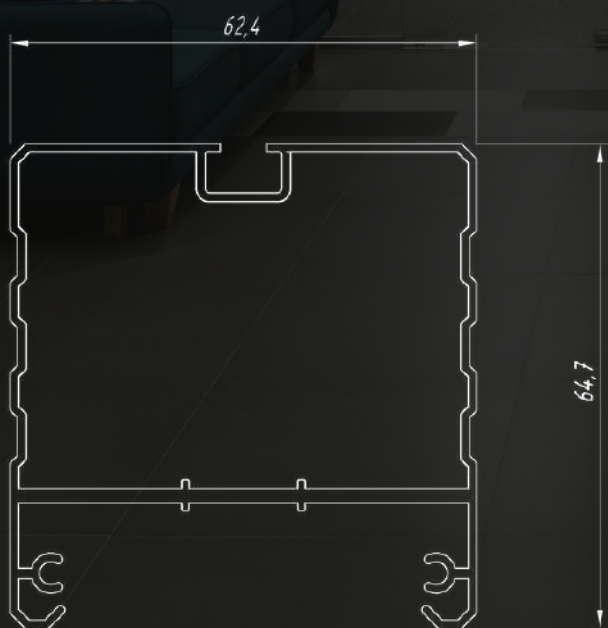


BODY	ALUMINUM AW-6063
OPTIC	OPAL POLYCARBONATE/LINEAR LENS+REFLECTOR DAISY
BODY COLOR (RAL)	On request
INGRESS PROTECTION	IP 42
SYSTEM POWER	up to 15-30 W per meter
POWER SUPPLY	HELVAR (Finland)
POWER FACTOR	>97
FLICKERING	1-3 %
LED SMD2835	SAMSUNG, SEUOL
COLOR TEMPERATURE	3000, 4000, 5000 K
STANDART	LM-80
COLOR RENDERING INDEX	>85-97 Ra
BEAM ANGLE	35°, 50°, 80°, 25x70°, 110°, Acmetric
LUMINOUS FLUX	ONE-SIDE/TWO-SIDE
WARRANTY	from 36 months
DIMENSIONS	B1800
SHOULDER LENGTH	to order
MOUNTING	pendant


LINEAR LIGHT INF-LED-DM

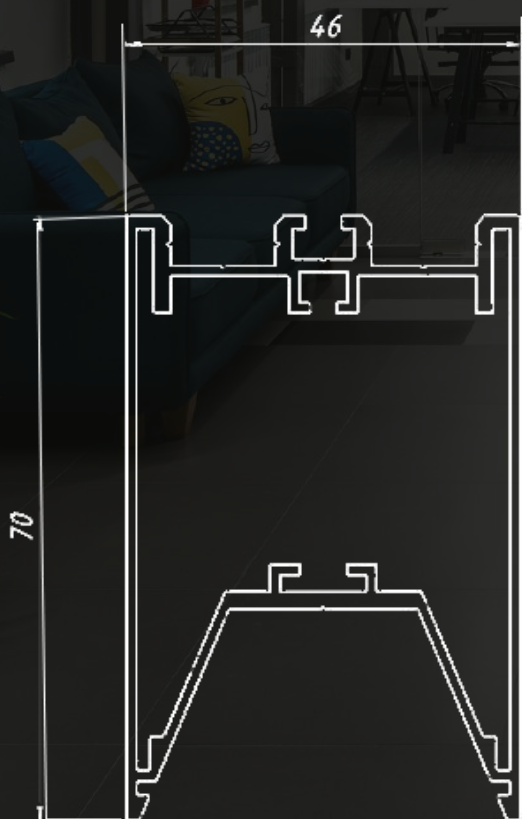


BODY	ALUMINUM AW-6063
OPTIC	OPAL POLYCARBONATE
BODY COLOR (RAL)	On request
INGRESS PROTECTION	IP 42
SYSTEM POWER	up to 40 W per meter
POWER SUPPLY	HELVAR (Finland)
POWER FACTOR	>97
FLICKERING	1-3 %
LED SMD2835	SAMSUNG, SEUOL
COLOR TEMPERATURE	3000, 4000, 5000 K
STANDART	LM-80
COLOR RENDERING INDEX	>85-97 Ra
BEAM ANGLE	110°
LUMINOUS FLUX	ONE-SIDE/TWO-SIDE
WARRANTY	from 36 months
DIMENSIONS	H70xW46xL up to 6000 mm
MOUNTING	pendant, bracket

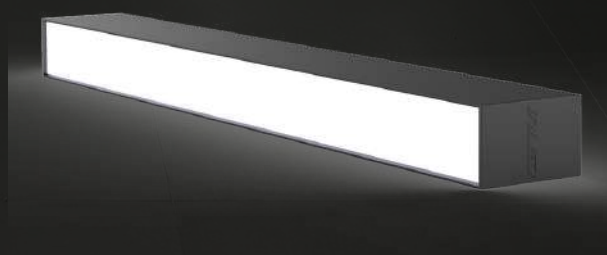


LINEAR LIGHT INF-LED-D

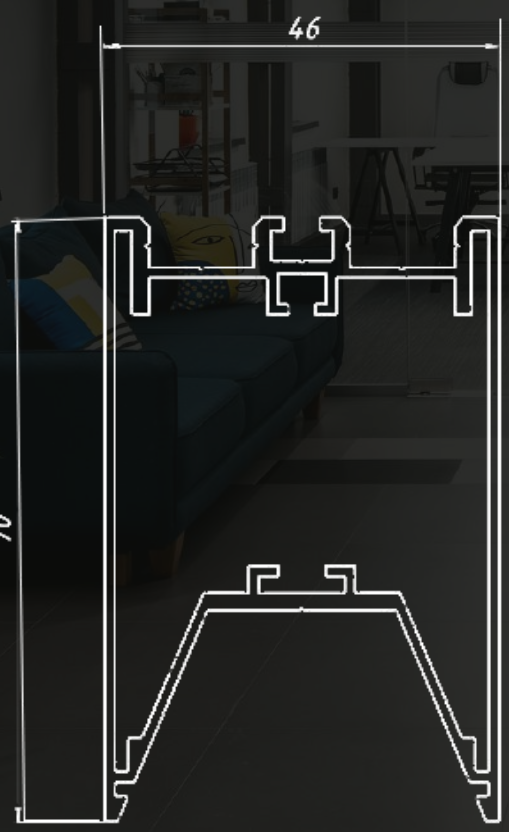


BODY	ALUMINUM AW-6063
OPTIC	LINEAR LENS+REFLECTOR DAISY
BODY COLOR (RAL)	On request
INGRESS PROTECTION	IP 20
SYSTEM POWER	up to 40 W per meter
POWER SUPPLY	HELVAR (Finland)
POWER FACTOR	>97
FLICKERING	1-3 %
LED SMD2835	SAMSUNG, SEUOL
COLOR TEMPERATURE	3000, 4000, 5000 K
STANDART	LM-80
COLOR RENDERING INDEX	>85-97 Ra
BEAM ANGLE	35°, 50°, 80°, 25x70°, 110°, Acmetric
LUMINOUS FLUX	ONE-SIDE/TWO-SIDE
WARRANTY	from 36 months
DIMENSIONS	H70xW46xL up to 6000 mm
MOUNTING	pendant, bracket

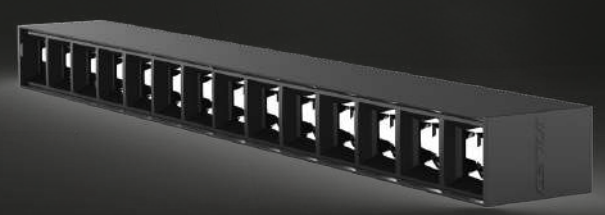

LINEAR LIGHT INF-LED-N-CROSS

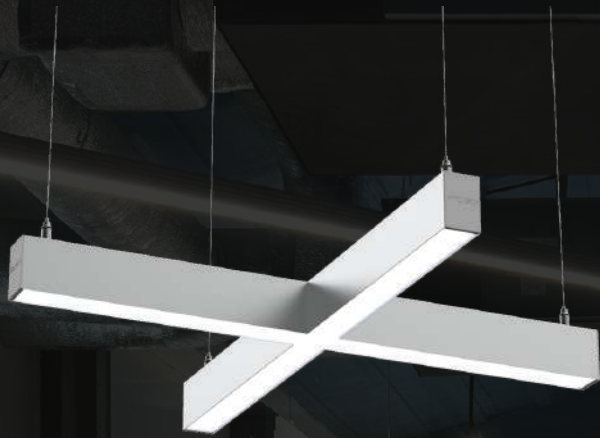


BODY	ALUMINUM AW-6063
OPTIC	OPAL POLYCARBONATE
BODY COLOR (RAL)	On request
INGRESS PROTECTION	IP 20
SYSTEM POWER	up to 40 W per meter
POWER SUPPLY	HELVAR (Finland)
POWER FACTOR	>97
FLICKERING	1-3 %
LED SMD2835	SAMSUNG, SEUOL
COLOR TEMPERATURE	3000, 4000, 5000 K
STANDART	LM-80
COLOR RENDERING INDEX	85-97 Ra
LIGHT DISTRIBUTION	DIFFUSE
BEAM ANGLE	110°
WARRANTY	from 36 months
DIMENSIONS	H70xW50
MOUNTING	pendant

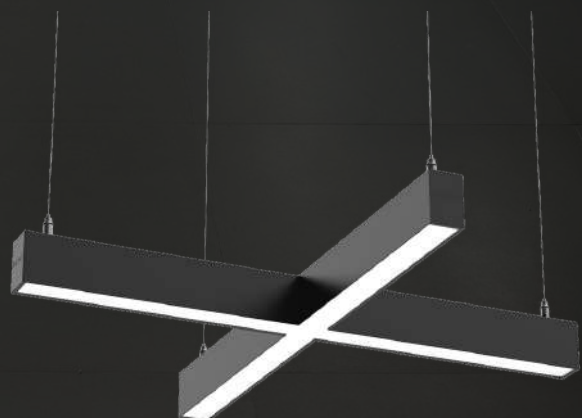

LINEAR LIGHT INF-LED-N-3C




BODY	ALUMINUM AW-6063
OPTIC	OPAL POLYCARBONATE
BODY COLOR (RAL)	On request
INGRESS PROTECTION	IP 20
SYSTEM POWER	up to 40 W per meter
POWER SUPPLY	HELVAR (Finland)
POWER FACTOR	>97
FLICKERING	1-3 %
LED SMD2835	SAMSUNG, SEUOL
COLOR TEMPERATURE	3000, 4000, 5000 K
STANDART	LM-80
COLOR RENDERING INDEX	85-97 Ra
LIGHT DISTRIBUTION	DIFFUSE
BEAM ANGLE	110°
WARRANTY	from 36 months
DIMENSIONS	H70xW50
MOUNTING	pendant

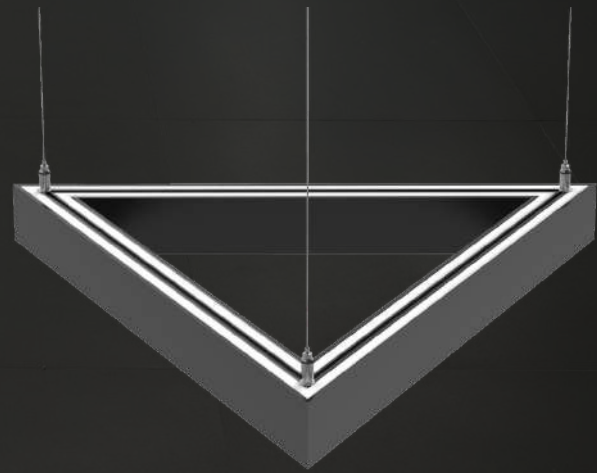

LINEAR LIGHT INF-LED-N-6C




BODY	ALUMINUM AW-6063
OPTIC	OPAL POLYCARBONATE
BODY COLOR (RAL)	On request
INGRESS PROTECTION	IP 20
SYSTEM POWER	up to 40 W per meter
POWER SUPPLY	HELVAR (Finland)
POWER FACTOR	>97
FLICKERING	1-3 %
LED SMD2835	SAMSUNG, SEUOL
COLOR TEMPERATURE	3000, 4000, 5000 K
STANDART	LM-80
COLOR RENDERING INDEX	85-97 Ra
LIGHT DISTRIBUTION	DIFFUSE
BEAM ANGLE	110°
WARRANTY	from 36 months
DIMENSIONS	H70xW50
MOUNTING	pendant

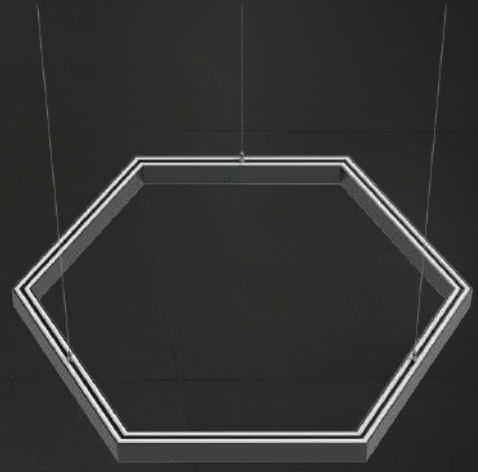



LINEAR LIGHT INF-LED-N-ROMB




BODY	ALUMINUM AW-6063
OPTIC	OPAL POLYCARBONATE
BODY COLOR (RAL)	On request
INGRESS PROTECTION	IP 20
SYSTEM POWER	up to 40 W per meter
POWER SUPPLY	HELVAR (Finland)
POWER FACTOR	>97
FLICKERING	1-3 %
LED SMD2835	SAMSUNG, SEUOL
COLOR TEMPERATURE	3000, 4000, 5000 K
STANDART	LM-80
COLOR RENDERING INDEX	85-97 Ra
LIGHT DISTRIBUTION	DIFFUSE
BEAM ANGLE	110°
WARRANTY	from 36 months
DIMENSIONS	H70xW50
MOUNTING	pendant

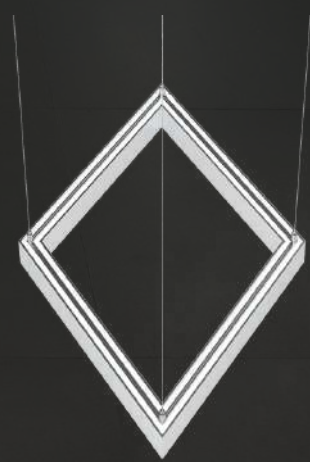

LINEAR LIGHT INF-LED-TUBE

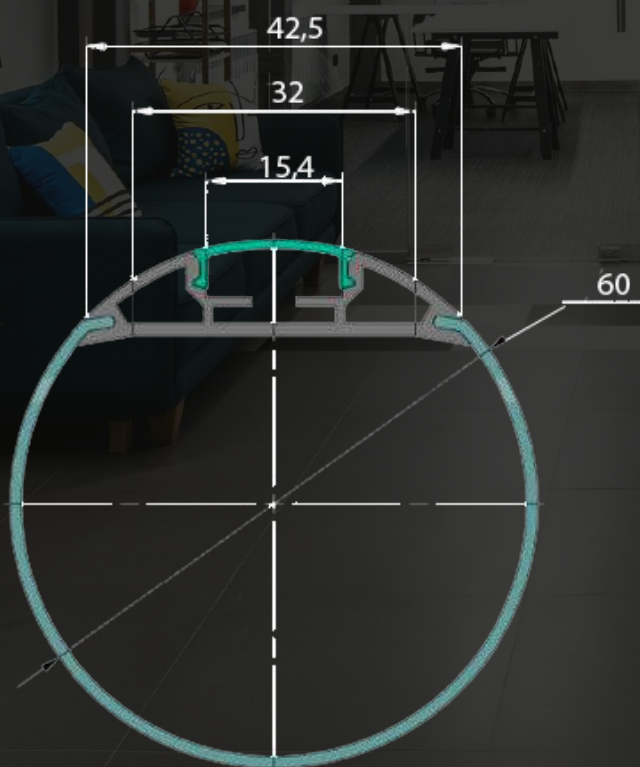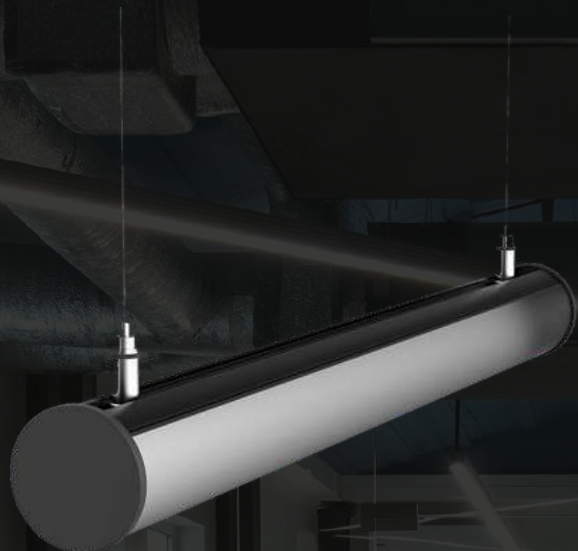

BODY	ALUMINUM AW-6063
OPTIC	OPAL POLYCARBONATE
BODY COLOR (RAL)	On request
INGRESS PROTECTION	IP 42
SYSTEM POWER	up to 30 W per meter
POWER SUPPLY	HELVAR (Finland)
POWER FACTOR	>97
FLICKERING	1-3 %
LED SMD2835	SAMSUNG, SEUOL
COLOR TEMPERATURE	3000, 4000, 5000 K
STANDART	LM-80
COLOR RENDERING INDEX	85-97 Ra
LUMINOUS FLUX	ONE-SIDE/TWO-SIDE
BEAM ANGLE	270°
WARRANTY	from 36 months
DIMENSIONS	ø 60 mm
MOUNTING	pendant

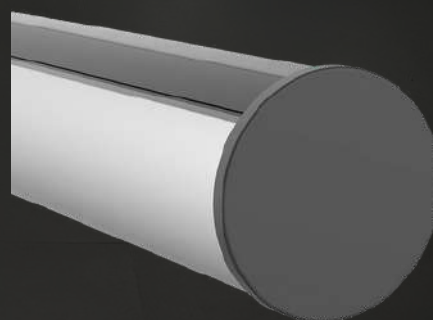

OFFICE LIGHTING




inled.com.ua

COMMERCIAL LIGHTING



inled.com.ua

INDUSTRIAL LIGHTING

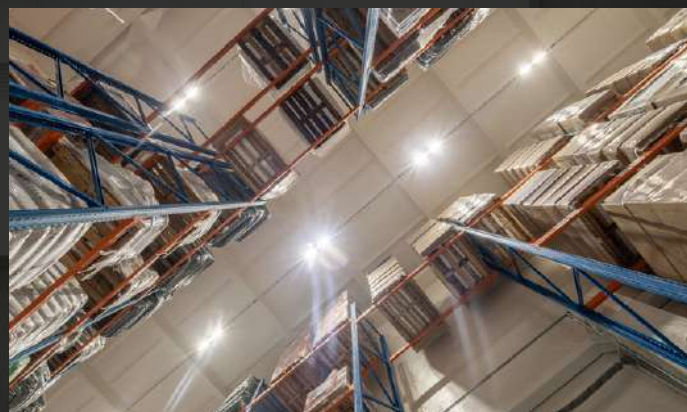

inled.com.ua

INLED

LIGHTING
FOR YOUR
BUSINESS



inled.com.ua

OUR CONTACTS

ADDRESS

03110, Ukraine, Kyiv,
Solomenskaya St., 3-B, office 205

E-MAIL

inled@infotel.ua

PHONE NUMBER

+38 (067) 616 00 04

+38 (044) 520 20 27

SITE

inled.com.ua



[inledukraine](https://www.facebook.com/inledukraine)